

⚠ ATTENTION: PLEASE READ ALL INSTRUCTIONS BEFORE ASSEMBLING/INSTALLING THIS PRODUCT

RSCGBRPM118136159



⚠ WARNING

ANY ALTERATIONS, UNINTENDED OR UNAPPROVED WORK/USE OF THIS PRODUCT COULD CREATE A HAZARDOUS CONDITION THAT CAN CAUSE DEATH, PERSONAL INJURY OR PROPERTY DAMAGE.

BEFORE YOU BEGIN:

- THE AVERAGE EXPECTED INSTALL TIME FOR THIS PRODUCT IS **40 MINUTES**
- READ ALL THE INSTRUCTIONS BEFORE ASSEMBLY & INSTALLATION
- ENSURE YOU HAVE SOME ASSISTANCE FROM A SECOND PERSON TO AVOID VEHICLE DAMAGE OR ANY PERSONAL INJURY
- BE AWARE ON THE LOCATION OF VEHICLE WIRING, GAS TANKS, GAS LINES, BRAKE LINES, & ANY OTHER IMPORTANT ITEMS
- ENSURE IT IS SAFE BEFORE DRILLING OR CUTTING ANYWHERE ON THE VEHICLE & INSTALLING ANY OF OUR PRODUCTS
- CONFIRM YOU HAVE ALL THE NECESSARY PARTS, TOOLS, EQUIPMENT, & TIME REQUIRED BEFORE COMMENCING

PART#: RSCGBRPM118136159 SUITS THE FOLLOWING MODELS:

- 2014-2021 RAM PROMASTER 1500 STD & HIGH ROOF, 118",136" & 159" W/B
- 2014-2021 RAM PROMASTER 2500 STD & HIGH ROOF 136" & 159" W/B
- 2014-2021 RAM PROMASTER 3500 STD & HIGH ROOF 136" & 159" W/B

TOOLS REQUIRED:



⚠ ATTENTION


IMAGES USED IN THIS GUIDE MAY VARY SLIGHTLY DEPENDING ON YOUR MODEL

HARDWARE INCLUDED



The RolaCase Partition Kit for the Ram ProMaster (Part#: **RSCGBRPM118136159**) is made up of the following 7 parts that need to be located and assembled together with the hardware provided:

1. Upper Cross Mount Beam
2. Upper Mid Roof Header Panel
3. Centre Panel
4. R/H side Panel
5. L/H side Panel
6. R/H standard shallow Setback
7. L/H standard shallow Setback
8. Lower Brace

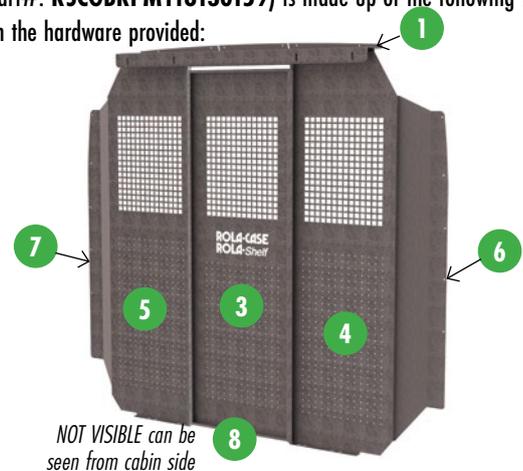

NOT VISIBLE can be seen from cabin side


There are 2 options for the above-mentioned kit that will need to be purchased separately depending on your personal preferences, they are as follows:

- **Centre Door Kit (Part#: RSCGBDHK)** This converts the fixed Centre Panel into a Swinging & Lockable Door for cabin to cargo access
- **Deep Setbacks (Part#: RSCSBRPM118136159)** This converts the default partition to sit an additional 2.5" in deeper for greater recline in the front seats

HARDWARE	QTY
HEX HEAD BOLTS M8x20	17
PAN PHILLIPS BOLTS M6x20	11
PAN PHILLIPS BOLTS M6x16	4
PAN PHILLIPS BOLTS M6x12	28
NYLOC NUTS M8	13
NYLOC NUTS M6	32
FLAT WASHER M6	16
SPRING WASHER M8	4
SPRING WASHER 1/4"	16
RIVET NUTS M6	16
RIVET NUTS M8	4



RSCGBDHK




RSCSBRPM118136159-

⚠ ATTENTION: PLEASE READ ALL INSTRUCTIONS BEFORE ASSEMBLING/INSTALLING THIS PRODUCT


⚠ WARNING

ANY ALTERATIONS, UNINTENDED OR UNAPPROVED WORK/USE OF THIS PRODUCT COULD CREATE A HAZARDOUS CONDITION THAT CAN CAUSE DEATH, PERSONAL INJURY OR PROPERTY DAMAGE.


A Begin by locating the Upper Cross Beam and the Upper Mid or High Roof Header Panel. Assemble the two products together using 9x "M8 x 20mm" bolts and Nyloc nuts provided. refer to image below:

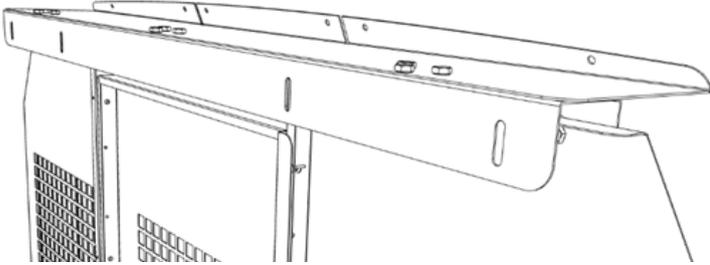

B Locate the Centre Panel, R/H side Panel, and the L/H side Panel. If you have purchased the "Swing Door & Lock Kit", please follow the instructions in that kit, otherwise assemble the three products together using 14x "M6 x 12mm" bolts and Nyloc nuts provided, refer to image below:

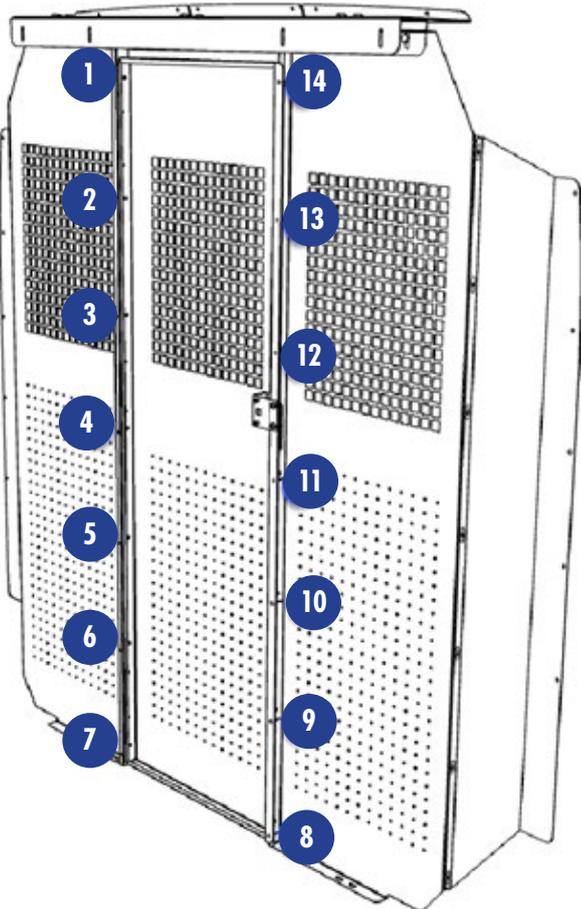


C Secure the Lower Brace to the bottom of the partition using four M6 x 16mm bolts and Nyloc nuts. The two M6 flat washers go on the slotted end of the lower brace, refer to image below:

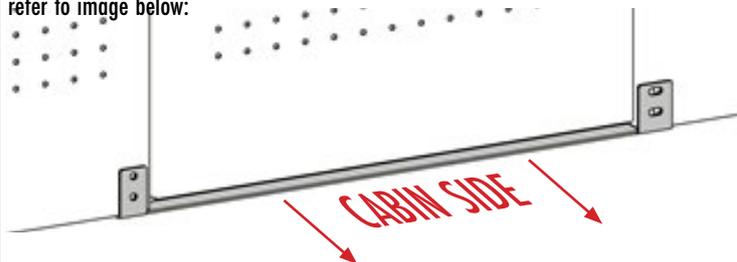


⚠ ATTENTION

IMAGES USED IN THIS GUIDE MAY VARY SLIGHTLY DEPENDING ON YOUR MODEL

D Secure the assembled Upper Beam to the top of the assembled partition using 4x "M8 x 20mm" bolts and Nyloc nuts provided. **Ensure you assemble the partition to the inside of face "A" on the cross beam for a standard setback. If you have purchased the optional Deep Setbacks, assemble the partition to the inside of face "B" on the cross beam which would be closest to the rear of the vehicle, refer to image below:**

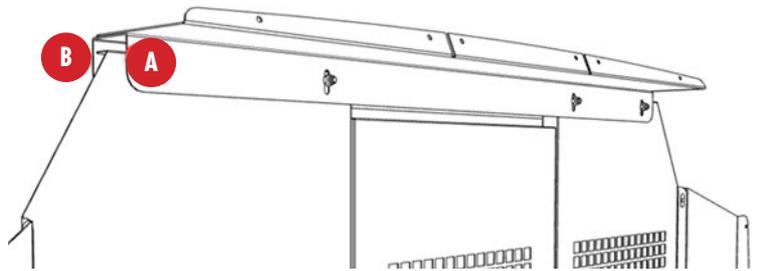

D Locate the R/H setback Panel, and the L/H Setback Panel. Note that If you have purchased the optional "Deep Setback Kit", please use those Setbacks in place of the standard ones, otherwise assemble as standard by securing the two products to both corresponding Side Panels using 14x "M6 x 12mm" bolts and Nyloc nuts provided. Ensure the flat washers are used on the slotted side, refer to image below:

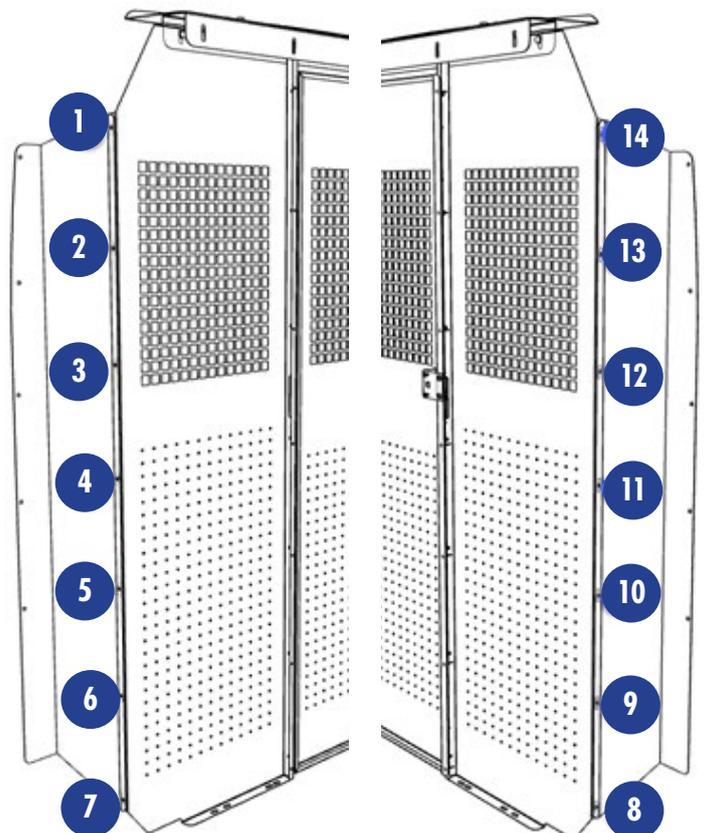

⚠ ATTENTION: PLEASE READ ALL INSTRUCTIONS BEFORE ASSEMBLING/INSTALLING THIS PRODUCT

⚠ WARNING

ANY ALTERATIONS, UNINTENDED OR UNAPPROVED WORK/USE OF THIS PRODUCT COULD CREATE A HAZARDOUS CONDITION THAT CAN CAUSE DEATH, PERSONAL INJURY OR PROPERTY DAMAGE.

E Now that the partition unit is fully assembled, use two people to lift the assembly into the van via the side door and position into place


F Mark out the 6 positions on the factory roof beam frame that match the upper partition header panel. Refer to the "A to F" orange bubble points in image below. Note some models already have holes here in the correct positions

G Mark out 4 positions on the factory corrugated floor where you will secure the base of the Left and Right side partition panels. Note that there are 4 slotted holes per side however you will only use 2 points per side where the high ridges of the floor meets up against the base of the partition panels. Refer to the "G to K" red bubble points in the image below

H Use two people to temporarily move the partition out of the way

I If necessary, drill the 6 points on the factory roof beam that you previously marked out to secure the 6x "M6" Rivet Nuts supplied, these would be the "A to F" orange bubble points in the image below

J Drill the 4 points on the factory floor that you previously marked out to secure the 4x "M8" Rivet Nuts supplied, these would be the "G to K" red bubble points in the image below

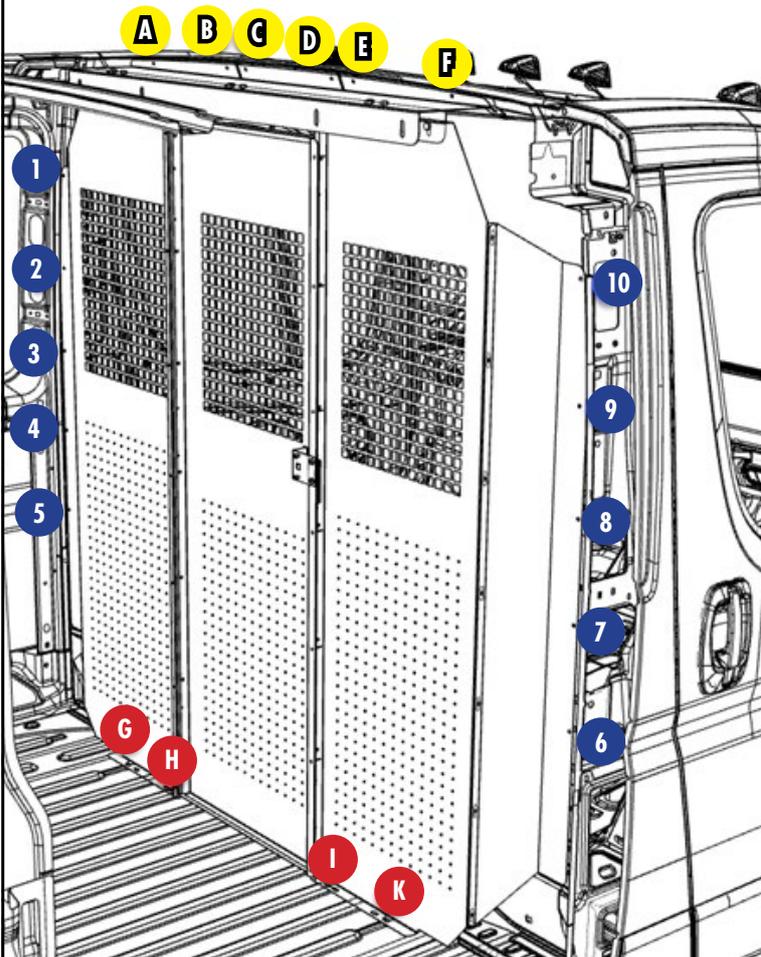

⚠ ATTENTION

IMAGES USED IN THIS GUIDE MAY VARY SLIGHTLY DEPENDING ON YOUR MODEL

K Use two people to reposition the partition in the correct and final resting place

L Insert the 10x "M6 x 20mm" pan bolts and spring washers through the partition wings and into the factory captive nuts on the "B pillar" of the vehicle. There are 5 bolts per side setback wing, 10 bolts in total. Refer to the "1 to 10" blue points in the image above

M Insert the 6x "M6 x 20mm" pan bolts and spring washers through the header panel and into the Rivet Nuts on the roof pillar of the vehicle. Refer to the "A to F" orange bubble points in the image above

N Insert the 4x "M8 x 20mm" hex bolts and spring washers through the side panels and into the Rivet Nuts on the floor of the vehicle. There are 2 bolts per side, 4 bolts in total. Refer to the "G to K" red bubble points in the image above

O Go back through and tighten all bolts securing the partition assembly to the vehicle

ROLA-CASE
ROLA-Shelf

ROLA-CASE
ROLA-Shelf

For further details please go to www.rolacase.com